

Angel Firmware v2.0 update instructions

Here are the instructions for performing this major firmware update to your Angle.

IMPORTANT NOTES (because this is a major update)

- If you have multiple Angel units in your system you will need to update them all individually
- You will need to do a factory reset on any units prior to doing the update
- You should connect directly to the units WiFi “Euronet” network (after the reset) to do the updates.
- A computer is needed with direct access to the Euronet system!

Steps:

1. Unplug all Angel lights except the unit you are updating
2. Perform a factory reset (*hold the select button while power cycling the unit - release the fan comes on*)
3. Connect to the devices access point “Euronet” with your PC
4. Navigate to: 10.0.0.10/rescue.html (*you will see a page like image #1*)
5. Click [Choose File] and select the file below (*from the zip file*)
“1_93_146 maincontroller_v3_firmware_release_v2.0.down”
6. Click [Start Update]
7. Once the update is at 100% you will be able to click [Apply Update] ***This is important**
8. Once the update is applied allow about 30 seconds for the system to reboot and then refresh your browser.
9. Now click [Choose File] again and select the file below (*from the zip file*)
“1_92_077 web_ui_data_v2.0.down”
10. Click [Start Update]
This will take more time as the web interface is quite large, do not interrupt this step!
11. Once complete you will not need to click the Apply update button.
12. You can now navigate to 10.0.0.10.html in your browser and you will see the new interface.
13. If you have more than one unit in your system unplug the first unit and repeat the steps above.
14. Then simply link them back together once all units are done and you’re set to go!

Also be sure to download the new mobile app (iOS and Android) to pair with the new firmware.

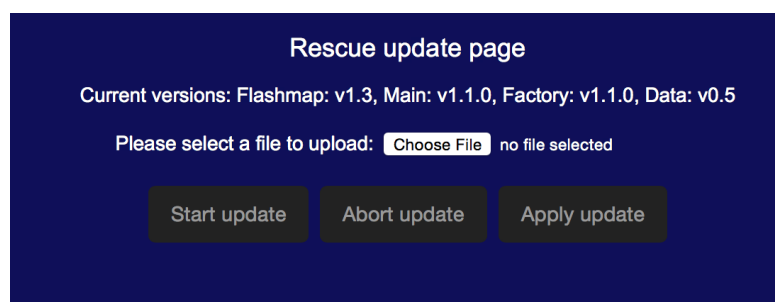


Image #1