



Vortex Flow sensor



## Flow sensor for liquid media Type 210

The flow sensor type 210 is based on the Kármán vortex trail principle. In comparison to the OEM flow sensor (type 200), the type 210 is available with enhanced power supply and output signals and is available with and without temperature measurement

With no moving parts the flow sensor is not sensitive to debris, has marginal pressure loss and high accuracy.

### Flow range

0.5 ... 150 l/min

### Nominal diameters

DN 6 / 8 / 10 / 15 / 20 / 25

### Temperature measurement

-40 ... +125 °C

- + Flow measuring with voltage, current, pulse or frequency output
- + Temperature non-sensitive measuring principle
- + Excellent media resistance (measuring element not in contact with the media)
- + Wide application temperature range
- + Marginal loss of pressure
- + Measuring element not sensitive to debris
- + Direct temperature measurement in the medium
- + Drinking water approval KTW, W270, ACS, WRAS

## Technical overview

### Flow measurement

Measuring principle	Vortex		Piezoelectric sensor element
Measuring range			0.5 ... 150 l/min
Nominal diameters			DN 6 / 8 / 10 / 15 / 20 / 25
Accuracy at < 50% fs (water)			< 1% fs
Accuracy at > 50% fs (water)			< 2% measuring value
Response time	Immediately. Therefore suitable for spigot use.	Frequency output (unfiltered)	Signal delay < 100 ms
			Response time < 5 ms
	Frequency output (filtered)	Analogue output	Signal delay < 2 s
			Response time < 500 ms

### Operating conditions

Medium	Suitable for heating circuit water with the usual additives Drinking water	Other medium on request
Temperature	Media	< +125 °C
	Ambient	-15 ... +85 °C
	Ambient (2x 4 ... 20 mA)	-15 ... +65 °C
	Storage	-30 ... +85 °C
Max. pressure and medium temperature	(for lifetime)	12 bar at +40 °C
	(for lifetime)	6 bar at +100 °C
	(for 600 hours)	4 bar at +125 °C
	(for 2 hours)	4 bar at +140 °C
Cavitation	The following equation is valid to prevent cavitation:	$P_{abs\ outlet} / P_{difference} > 5.5$

### Materials in contact with medium (FDA-conform)

Sensor paddle	ETFE
Case with damming body	PA6T/6I (40% GF)
Sealing material	EPDM (perox.)
	FPM

### Electrical connection

Connector M12x1	Protection standard IP 65
-----------------	------------------------------

### Weight


DN 6 / 8	~ 47 g
DN 10	~ 57 g
DN 15	~ 68 g
DN 20	~ 92 g
DN 25	~ 100 g

### Test / Admissions

Electromagnetic compatibility	CE conformity acc. EN 61326-2-3
	WRAS
Drinking water approval	Plastic parts with KTW and W270 approval
	ACS

Packaging (multiple packaging)	Connection copper tube	Outside thread K	Outside thread G
DN 6	–	Blister 30x	Blister 30x
DN 8 / 10	Blister 30x	Blister 30x	Blister 30x
DN 15	Blister 30x	Blister 30x	Blister 20x
DN 20	Blister 20x	Blister 20x	Blister 15x
DN 25	–	Blister 20x	Blister 15x

## Minimum life span on high flow rate and high temperature

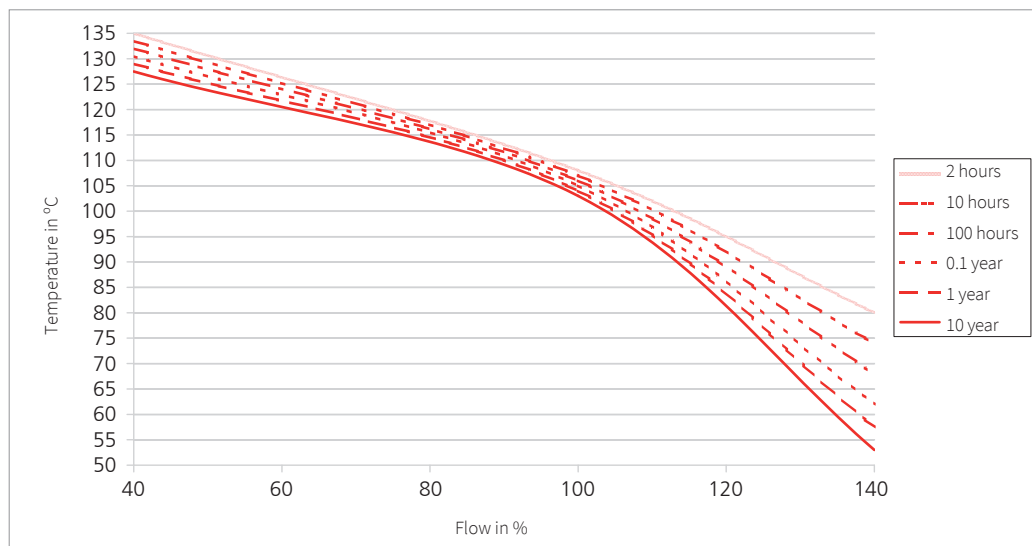

## Analogue output - Electrical overview

### Temperature measurement (≥ 8 DN)

Measuring principle	Resistance	PT1000
	Measuring range	-40 ... +125 °C
PT1000	Accuracy	class B DIN EN 60751
		@ T = 0 °C
		@ T ≠ 0 °C
	Measuring range	± 0.3 K ± 0.005 * ΔT
	Accuracy	-25 ... +125 °C
0 ... 10 V		± 0.5 K ± 0.005 * ΔT
	Calculation temperature	T (°C) = $\frac{U_{OUT,T} - 10V}{10V} * U_{OUT,T} - 25 °C$
	Measuring range	-25 ... +125 °C
4 ... 20 mA	Accuracy	± 0.5 K ± 0.005 * ΔT
	Calculation temperature	T (°C) = $\frac{I_{OUT,T} - 4mA}{16mA} * 150 °C - 25 °C$

Electronic	Voltage output	Current output	Dual power output
Power supply	11.5 ... 33 VDC	8 ... 33 VDC	10 ... 33 VDC
Output flow (Q)	0 ... 10 V	4 ... 20 mA	4 ... 20 mA
Output temperature (T)	0 ... 10 V	–	4 ... 20 mA
Load against GND or IN	< 6 mA / < 100 nF <sup>1)</sup>	< (U <sub>IN</sub> - 8 V) / 20 mA	< (U <sub>IN</sub> - 10 V) / 20 mA
Current consumption load free (I <sub>IN</sub> )	< 5 mA	–	–
Electrical reliability	Short circuit, reverse voltage and external voltage protected within the admissible supply voltage.		

## Analogue output - Nominal diameters dependent variables

DN	Measuring range [l/min]	Flow range [m/s]	Pressure drop <sup>2),3)</sup>	K <sub>U</sub> $\left[ \frac{L}{V * min} \right]$	K <sub>I</sub> $\left[ \frac{L}{mA * min} \right]$
6	0.5 ... 10	0.074 ... 1.474	240.00*Q <sup>2</sup>	1.0	0.625
8	0.9 ... 15	0.133 ... 2.210	85.00*Q <sup>2</sup>	1.5	0.938
10	1.8 ... 32	0.265 ... 4.716	22.50*Q <sup>2</sup>	3.2	2.000
10	2.0 ... 40	0.295 ... 5.895	22.50*Q <sup>2</sup>	4.0	2.500
15	3.5 ... 50	0.290 ... 4.145	6.70*Q <sup>2</sup>	5.0	3.125
20	5.0 ... 85	0.265 ... 4.509	2.50*Q <sup>2</sup>	8.5	5.313
25	9.0 ... 150	0.283 ... 4.709	0.92*Q <sup>2</sup>	15.0	9.375

### Characteristic line formula current output

$$Q_V = K_I * (I_{OUT} - 4 \text{ mA})$$

### Characteristic line formula voltage output

$$Q_V = K_U * U_{OUT}$$

### Legend

Q <sub>V</sub>	Volume flow rate	[l/min]
K <sub>U</sub>	Coefficient voltage output	[(l/min) / V]
K <sub>I</sub>	Coefficient current output	[(l/min) / mA]
U <sub>OUT</sub>	Voltage	[V]
I <sub>OUT</sub>	Current	[mA]

		1	2	3	4	5	6	7
Analogue output - Order code selection table		210.	X	X	X	X	X	X
Version	Flow	9			3,4	4		
	Flow and temperature (PT1000)	8			3,4	5		
	Flow and temperature (2x 0 ... 10 V)	6			3	5		
	Flow and temperature (2x 4 ... 20 mA)	5			5	5		
Nominal diameters and Flow range	DN 6 0.5 ... 10 l/min.	9	0	6				K,G
	DN 8 0.9 ... 15 l/min.		0	8				
	DN 10 1.8 ... 32 l/min.		1	0				
	DN 10 2.0 ... 40 l/min.		1	1				
	DN 15 3.5 ... 50 l/min.		1	5				
	DN 20 5.0 ... 85 l/min.		2	0				
	DN 25 9.0 ... 150 l/min.		2	5				K,G
Output / power supply	Analogue output 0 ... 10 V 11.5 ... 33 VDC	9,8,6			3			
	Analogue output 4 ... 20 mA 8 ... 33 VDC	9,8			4			
	Analogue output 4 ... 20 mA 10 ... 33 VDC	5			5			
Electrical connection	Connector M12x1 3-pole (with condensation protection)	9			3,4	4		
	5-pole (with condensation protection)	8,6,5				5		
Sealing material	EPDM Ethylene propylene rubber (peroxidically cross-linked)						1	
	FPM <sup>4)</sup> Fluoro elastomer						2	
Tube connection	connection copper tube (max. DN 20)							N
	outside thread K (see dimension diagram)							K
	outside thread G (see dimension diagram)							G

<sup>1)</sup> against GND only

<sup>2)</sup> incl. 3xDi inlet and outlet side

<sup>3)</sup> Pv in Pa; Q in l/min

<sup>4)</sup> No drinking water approval

## Frequency output (filtered) and pulse output - Electrical overview

### Temperature measurement (> 8 DN)

Measuring principle	Resistance	PT1000 class B DIN EN 60751
	Measuring range	-40 ... +125 °C
PT1000	Accuracy	Class B DIN EN 60751
		@ T = 0 °C
		@ T ≠ 0 °C
		± 0.3 K
		± 0.3 K ± 0.005 * ΔT
Temperature influences	Self-heating at temperature sensor	1 K/mW
	Conduction resistance to connector	0.8 Ω

### Electronic

Power Supply	4.75 ... 33 VDC
Output flow (Q)	< 0.5 ... > U <sub>m</sub> - 0.5 V
Level height (open collector)	
Output temperature (T)	Resistant signal
Load against GND or IN	PT1000 class B DIN EN 60751
Current consumption load free (I <sub>m</sub> )	> 1 kΩ / < 10 kΩ
	< 3 mA
Electrical reliability	Short circuit, reverse voltage and external voltage protected within the admissible supply voltage.

## Frequency output (filtered) and pulse output - Nominal diameters dependent variables

DN	Measuring range [l/min]	Flow range [m/s]	Pressure drop <sup>1),2)</sup>	K <sub>f</sub> [(l/min) / Hz] at 0 ... 1000 Hz	Quantity per pulse K <sub>i</sub> [ml] (pulse)	Pulse (pulse output) [1/l]
6	0.5 ... 10	0.074 ... 1.474	240.00*Q <sup>2</sup>	0.01	0.20	5000
8	0.9 ... 15	0.133 ... 2.210	85.00*Q <sup>2</sup>	0.015	0.20	5000
10	1.8 ... 32	0.265 ... 4.716	22.50*Q <sup>2</sup>	0.032	0.50	2000
10	2.0 ... 40	0.295 ... 5.895	22.50*Q <sup>2</sup>	0.04	0.50	2000
15	3.5 ... 50	0.290 ... 4.145	6.70*Q <sup>2</sup>	0.05	1.00	1000
20	5.0 ... 85	0.265 ... 4.509	2.50*Q <sup>2</sup>	0.085	1.00	1000
25	9.0 ... 150	0.283 ... 4.709	0.92*Q <sup>2</sup>	0.15	1.25	800

### Characteristic line formula frequency output filtered (0 ... 1000 Hz, other frequency on request)

$$Q_v = K_f \cdot f$$

### Pulse

$$l/\min = \frac{\text{pulse}}{s} \cdot K_i \cdot \frac{60}{1000}$$

### Legend

Q <sub>v</sub>	Volume flow rate	[l/min]
K <sub>f</sub>	Coefficient frequency output filtered	[(l/min) / f]
f	Frequency	[Hz]

## Frequency output (filtered) and pulse output - Order code selection table

210.

		1	2	3	4	5	6	7
		X	X	X	X	X	X	X
Version	Flow	9				4		
	Flow and temperature (PT1000)	8				5		
Nominal diameters and flow range	DN 6 0.5 ... 10 l/min.	9	0	6				K,G
	DN 8 0.9 ... 15 l/min.		0	8				
	DN 10 1.8 ... 32 l/min.		1	0				
	DN 10 2.0 ... 40 l/min.		1	1				
	DN 15 3.5 ... 50 l/min.		1	5				
	DN 20 5.0 ... 85 l/min.		2	0				
	DN 25 9.0 ... 150 l/min.		2	5				K,G
Output / power supply	Frequency output (filtered)				6			
	Pulse output				7			
Electrical connection	Connector M12x1 3-pole (with condensation protection)	9				4		
	5-pole (with condensation protection)	8				5		
Sealing material	EPDM Ethylene propylene rubber (peroxidically cross-linked)						1	
	FPM <sup>3)</sup> Fluoro elastomer						2	
Tube connection	Plastic PA6T / 6I							N
	connection copper tube (max. DN 20)							K
	outside thread K (see dimension diagram)							G
	outside thread G (see dimension diagram)							

<sup>1)</sup> incl. 3xDi inlet and outlet side

<sup>2)</sup> Pv in Pa; Q in l/min

<sup>3)</sup> No drinking water approval

## Frequency output (unfiltered) - Electrical overview

### Temperature measurement (> 8 DN)

Measuring principle	Resistance			PT1000 class B DIN EN 60751
	Measuring range			-40 ... +125 °C
PT1000	Accuracy	Class B DIN EN 60751	@ T = 0 °C	± 0.3 K
			@ T ≠ 0 °C	± 0.3 K ± 0.005 * ΔT
Temperature influences	Self-heating at temperature sensor			1 K/mW
	Conduction resistance to connector			0.8 Ω

### Electronic

Power Supply		4.75 ... 33 VDC
Output flow (Q)	Level height (push-pull)	< 0.5 ... > U <sub>IN</sub> - 0.5 V
Output temperature (T)	Resistant signal	PT1000 class B DIN EN 60751
Load against GND or IN		< 1 mA / < 100 nF
Current consumption load free (I <sub>IN</sub> )		< 2 mA
Electrical reliability	Short circuit, reverse voltage and external voltage protected within the admissible supply voltage.	

## Frequency output (unfiltered) - Nominal diameters dependent variables

DN	Tube connection	Measuring range [l/min]	Flow range [m/s]	Pressure drop <sup>1),2)</sup>	Quantity per pulse @50% fs [ml]	Frequency range unfiltered [Hz]	Q <sub>0</sub> [l/min]	K <sub>f</sub> [(l/min) / f]
6	K	0.5 ... 10	0.074 ... 1.474	240.00*Q <sup>2</sup>	0.386	27 ... 426	-0.14	0.0238
	G							
8	K	0.9 ... 15	0.133 ... 2.210	85.00*Q <sup>2</sup>	0.628	30 ... 384	-0.3	0.0398
	G				0.631	30 ... 388		0.0394
	N				0.614	31 ... 399		0.0383
10	K	1.8 ... 32	0.265 ... 4.716	22.50*Q <sup>2</sup>	1.399	24 ... 379	-0.2	0.0850
	G				1.370	24 ... 387		0.0832
	N				1.384	24 ... 383		0.0841
10	K	2.0 ... 40	0.295 ... 5.895	22.50*Q <sup>2</sup>	1.403	26 ... 473	-0.2	0.0850
	G				1.373	26 ... 483		0.0832
	N				1.388	26 ... 478		0.0841
15	K	3.5 ... 50	0.290 ... 4.145	6.70*Q <sup>2</sup>	3.047	20 ... 272	-0.2	0.1843
	G				3.016	20 ... 275		0.1824
	N				3.077	20 ... 270		0.1861
20	K	5.0 ... 85	0.265 ... 4.509	2.50*Q <sup>2</sup>	6.213	14 ... 227	-0.3	0.3754
	G				6.125	14 ... 230		0.3701
	N				6.208	14 ... 227		0.3751
25	K	9.0 ... 150	0.283 ... 4.709	0.92*Q <sup>2</sup>	12.412	12 ... 201	-0.2	0.7467
	G				12.251	12 ... 204		0.7370

### Characteristic line formula frequency output unfiltered

$$Q_v = K_f \cdot f + Q_0$$

### Formula quantity per pulse [litres/pulse]

$$\text{Quantity} = \frac{K_f \cdot Q_v}{60 \cdot (Q_v - Q_0)}$$

### Legend

Q <sub>v</sub>	Volume flow rate	[l/min]
Q <sub>0</sub>	Axis intercept	[l/min]
K <sub>f</sub>	Coefficient frequency output	[(l/min) / f]
f	Frequency	[Hz]
Quantity	Quantity per pulse	litres
Pulse		pulse

## Frequency output (unfiltered) - Order code selection table

				1	2	3	4	5	6	7
				210.	X	X	X	X	X	X
Version	Flow			9				4		
	Flow and temperature (PT1000)			8				5		
Nominal diameters and flow range	DN 6	0.5 ...	10 l/min.	9	0	6				K,G
	DN 8	0.9 ...	15 l/min.		0	8				
	DN 10	1.8 ...	32 l/min.		1	0				
	DN 10	2.0 ...	40 l/min.		1	1				
	DN 15	3.5 ...	50 l/min.		1	5				
	DN 20	5.0 ...	85 l/min.		2	0				
	DN 25	9.0 ...	150 l/min.		2	5				K,G
Output / power supply	Frequency output (unfiltered)						2			
Electrical connection	Connector M12x1	3-pole	(with condensation protection)	9				4		
		5-pole	(with condensation protection)	8				5		
Sealing material	EPDM	Ethylene propylene rubber (peroxidically cross-linked)							1	
	FPM <sup>3)</sup>	Fluoro elastomer							2	
Tube connection	Plastic PA6T / 6I	connection copper tube (max. DN 20)								N
		outside thread K (see dimension diagram)								K
		outside thread G (see dimension diagram)								G

<sup>1)</sup> incl. 3xDi inlet and outlet side

<sup>2)</sup> Pv in Pa; Q in l/min


<sup>3)</sup> No drinking water approval

Accessories <i>(supplied loose)</i>				Order number
Connection kit <sup>1)</sup> DN 8, 10 with copper tube				113775
Connection kit <sup>1)</sup> DN 8, 10 with adapter Rp 3/8 Stainless steel 1.4305/AISI 303				113776
Connection kit <sup>1)</sup> DN 15 with copper tube				113777
Connection kit <sup>1)</sup> DN 15 with adapter Rp 1/2 Stainless steel 1.4305/AISI 303				113778
Connection kit <sup>1)</sup> DN 20 with copper tube				113779
Connection kit <sup>1)</sup> DN 20 with adapter Rp 3/4 Stainless steel 1.4305/AISI 303				113780
Straight-wire box for connector M12x1 with cable	3-pole	200 cm		114605
Corner-wire box for connector M12x1 with cable	3-pole	200 cm		114604
Straight-wire box for connector M12x1 with cable	5-pole	200 cm	(with temperature)	114564
Corner-wire box for connector M12x1 with cable	5-pole	200 cm	(with temperature)	114563
Straight-wire box for connector M12x1 screwing terminal	5-pole			115024
Clip for DN 8,10				112116
Clip for DN 15				110941
Clip for DN 20				112122
O-Ring for DN 8, DN 10	EPDM	ø 13.95 x 2.62	Copper tube and adapter	112124
O-Ring for DN 15	EPDM	ø 17.86 x 2.62	Copper tube and adapter	112265
O-Ring for DN 20	EPDM	ø 21.89 x 2.62	Copper tube and adapter	112723
O-Ring for DN 25	EPDM	ø 31 x 3	(as a replacement, already assembled)	112792
Connection copper tube for DN 8, 10				L=150 mm 112121
Connection copper tube for DN 15				L=150 mm 112211
Connection copper tube for DN 20				L=150 mm 112306
Adapter for DN 8 und DN 10	Rp 3/8		Stainless steel 1.4305/AISI 303	112655
Adapter for DN 15	Rp 1/2		Stainless steel 1.4305/AISI 303	112660
Adapter for DN 20	Rp 3/4		Stainless steel 1.4305/AISI 303	112661

## Tube mounting instructions


Consider the following to ensure the correct function of the sensor.

- Only diameter changes from large to small are allowed.
- Avoid repeated elbows in the same level at entryside

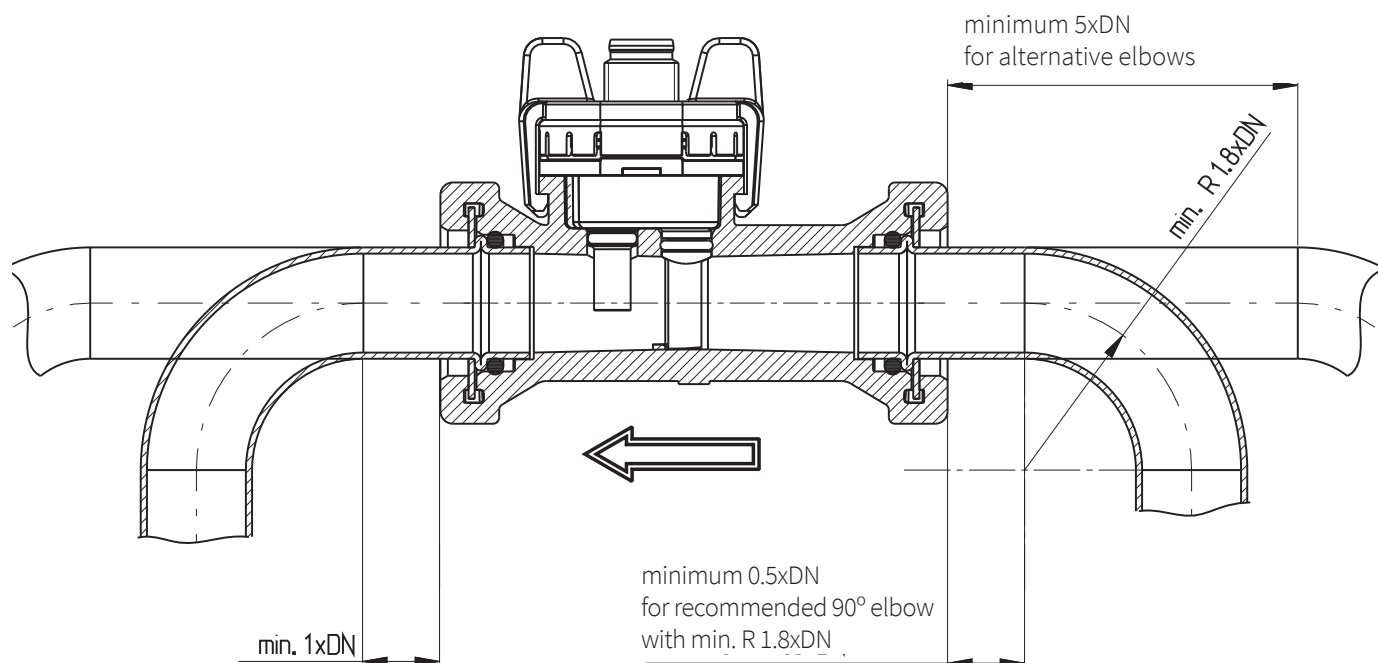


<sup>1)</sup> Connection set includes: 2x Clip, 2x Copper tubes or Adapter and 2x O-Ring


## Dimension diagram DN 6, 8, 10, 15, 20, 25

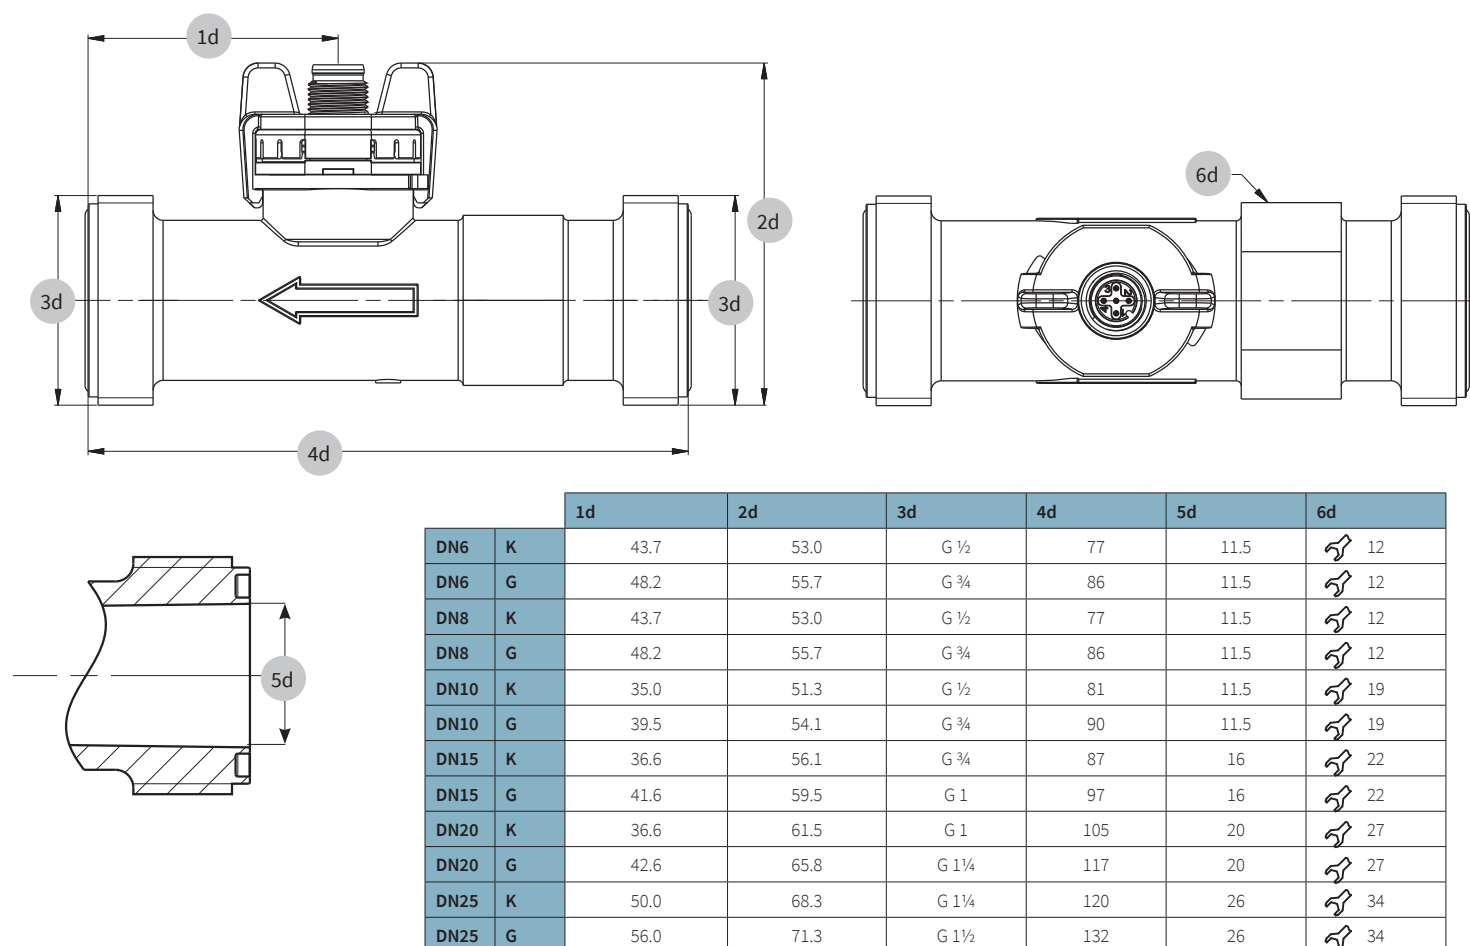

## Dimension diagram DN 8, 10, 15, 20

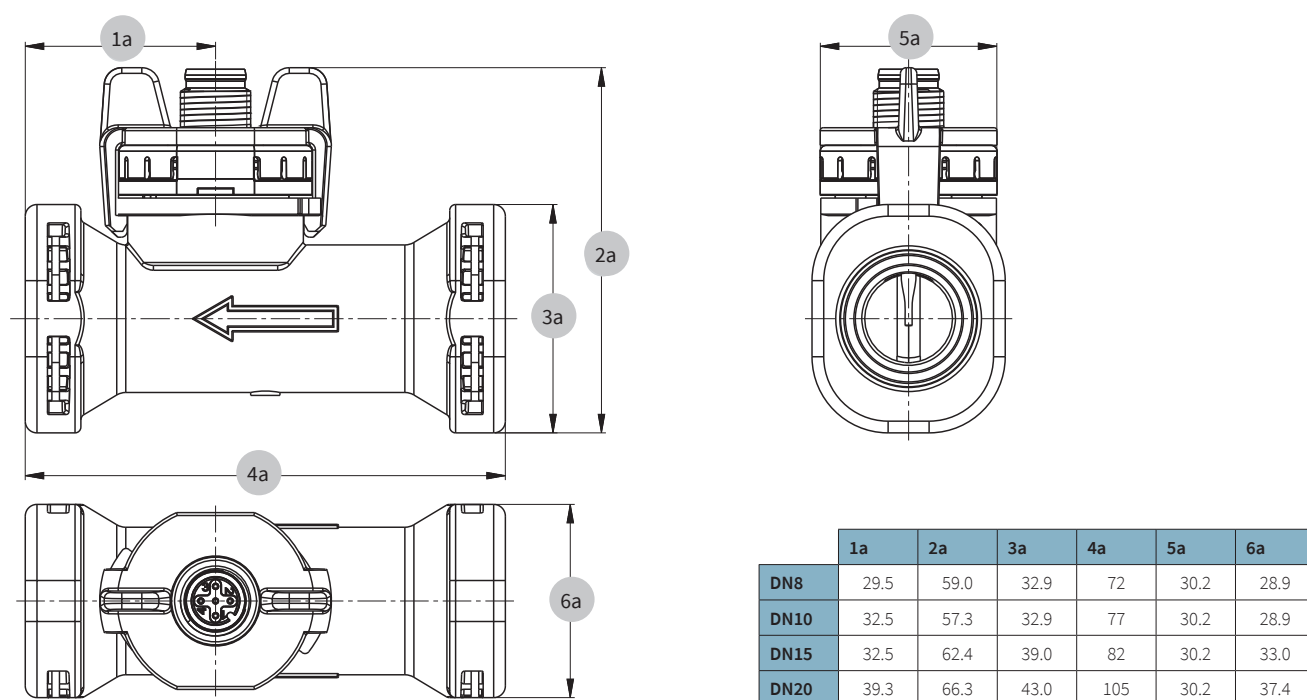


## Admissible locking torque

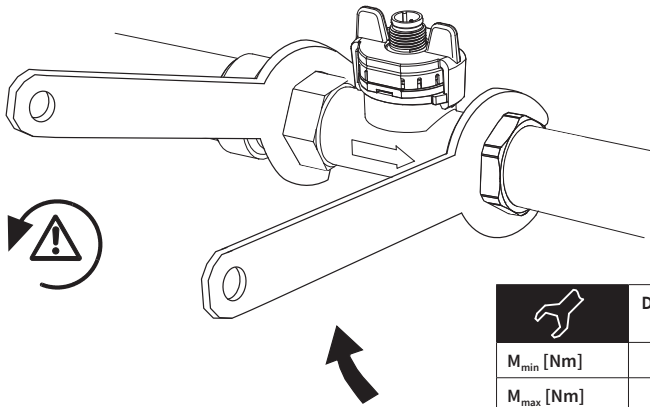


	DN6/8/10 G ½	DN6/8/10 G ¾	DN15 G ¾	DN15 G1	DN20 G1	DN20 G1 ¼	DN25 G1 ¼	DN25 G1 ½
<b>M<sub>min</sub> [Nm]</b>	1	1	1	2	2	2.5	2.5	2.5
<b>M<sub>max</sub> [Nm]</b>	12	12	12	12	12	15	15	15

## Accessories DN 8, 10, 15, 20

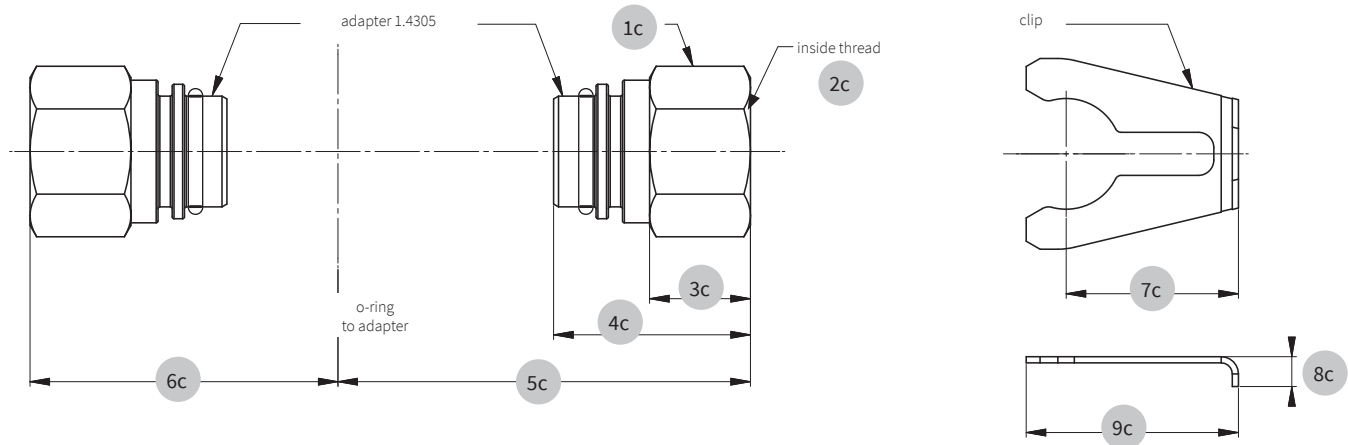

	1c	2c	3c	4c	5c	6c	7c	8c	9c
<b>DN8</b>	22	Rp ¾ DIN 2999 length min. 9	14.0	29	57.65	44.65	24.5	7.3	30.8
<b>DN10</b>	22	Rp ¾ DIN 2999 length min. 9	14.0	29	59.65	47.55	24.5	7.3	30.8
<b>DN15</b>	24	Rp ½ DIN 2999 length min. 11.5	16.4	32	67.05	50.05	28.0	7.6	34.5
<b>DN20</b>	30	Rp ¾ DIN 2999 length min. 13	18.5	38	82.25	58.85	28.0	8.7	34.5

## Geometry of customers connection tube DN 8, 10, 15, 20

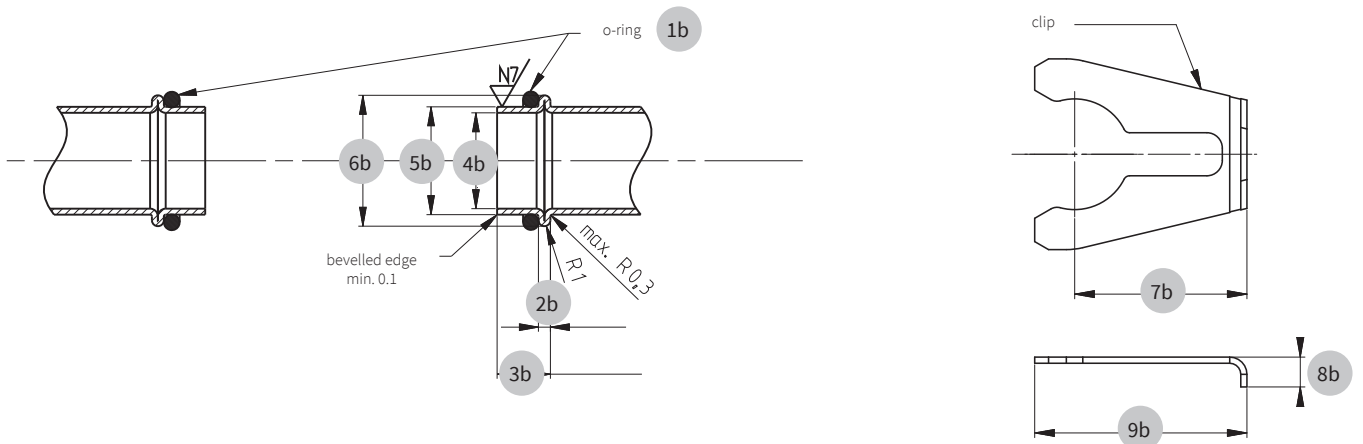


	1b	2b	3b	4b	5b	6b	7b	8b	9b
<b>DN8</b>	ø 13.95x2.62	2 ± 0.2	8.9 ± 0.2	ø 13 ± 0.2	ø 15.00 ± 0.08	ø 18.88 ± 0.1	24.5	7.3	30.8
<b>DN10</b>	ø 13.95x2.62	2 ± 0.2	8.9 ± 0.2	ø 13 ± 0.2	ø 15.00 ± 0.08	ø 18.88 ± 0.1	24.5	7.3	30.8
<b>DN15</b>	ø 17.86x2.62	2 ± 0.2	8.9 ± 0.3	ø 16 ± 0.2	ø 18.00 <sup>+0.08</sup> <sub>-0.06</sub>	ø 21.85 ± 0.1	28.0	7.6	34.5
<b>DN20</b>	ø 21.89x2.62	2 ± 0.2	12.9 ± 0.3	ø 20 ± 0.2	ø 22.00 <sup>+0.08</sup> <sub>-0.06</sub>	ø 25.85 ± 0.1	28.0	8.7	34.5




## Electrical connection

### Connector M12x1 without temperature measurement


1




Frequency output  
unfiltered

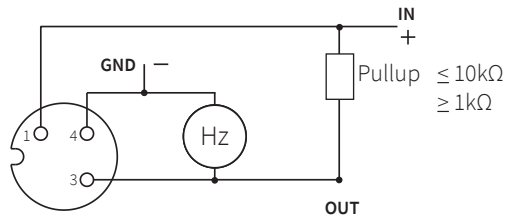

Frequency output filtered  
Pulse output




Current output

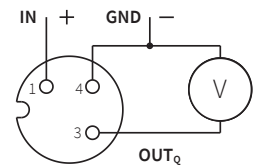


Voltage output

### Connector M12x1 with temperature measurement


2

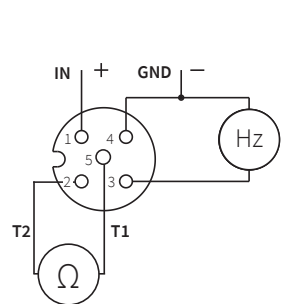


frequency output with  
temperature measurement  
PT1000

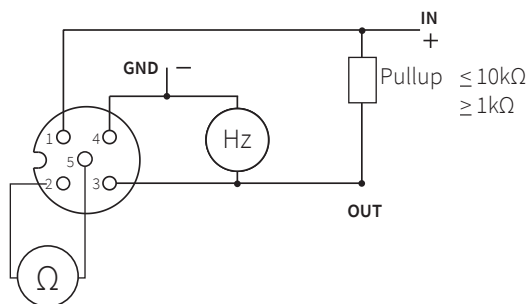


Frequency output filtered  
Pulse output

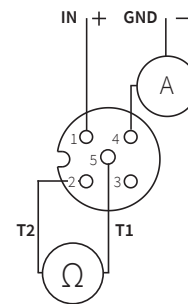


Current output  
with temperature  
measurement  
PT1000

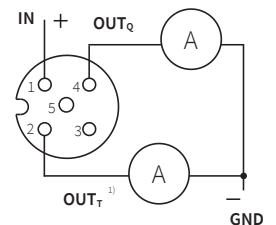

Current output with  
temperature measu-  
rement 4 ... 20 mA

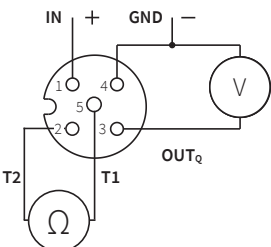

Voltage output with temperature  
measurement PT1000

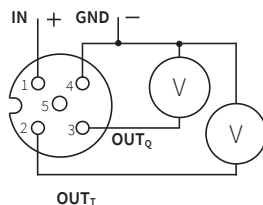

Voltage output with temperature  
measurement 0 ... 10 V



Pin		Colour
1	1	brown
3		blue
4		black
1	2	brown
2		white
3		blue
4		black
5		gray

<sup>1)</sup> «OUT T» is only in operation if «OUT Q» is connected


## Influence of glycol

With the following definitions we are able to correct the influence of media with higher viscosity than water (= media viscosity > 1.8 cSt) in order to reach a measuring accuracy of 3% fs in the range of 1.8 - 4 cSt and of 4% in the range of 4 - 14 cSt ( $\nu$  = viscosity in cSt).


### Definition of viscosity of glycol-water-compound

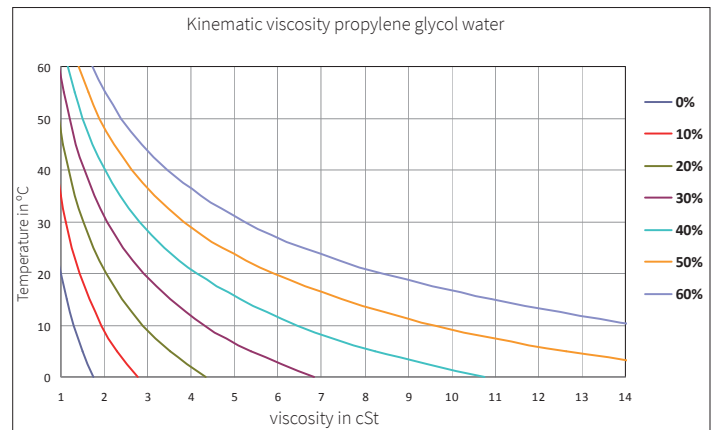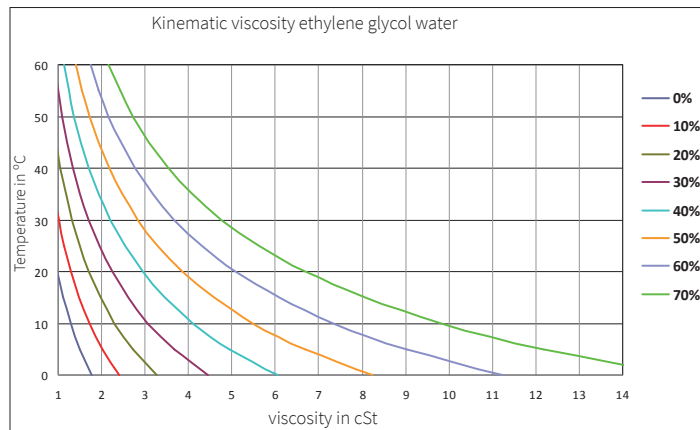

### Definition of respond threshold $Q_{\min}$

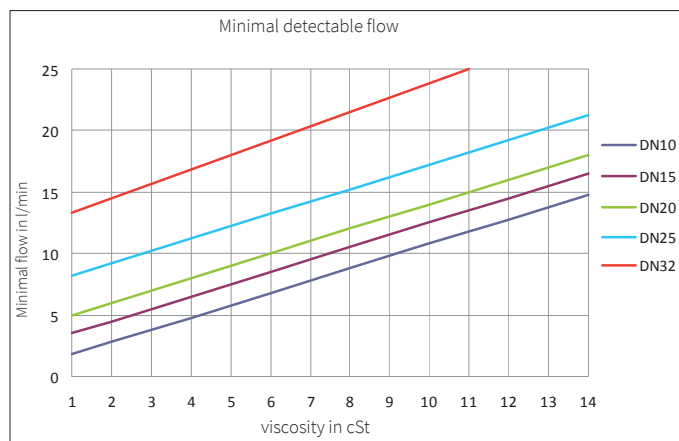

### Definition of characteristic line formula $Q_v = k_f \cdot f + Q_0$

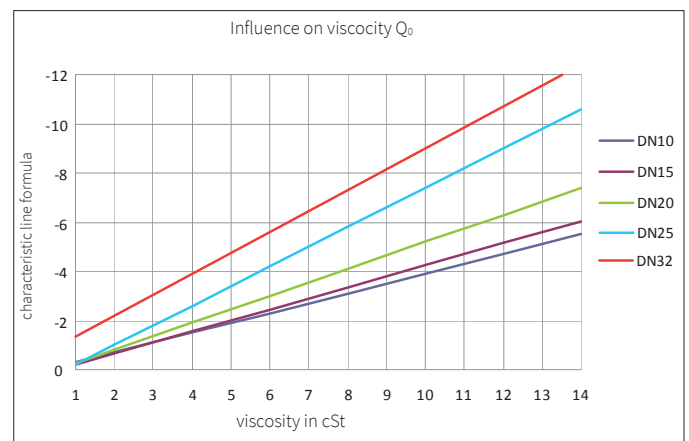

#### Formula respond threshold $Q_{\min}$ in l/min

< DN 10 not possible

DN10:	$Q_{\min} = u + 0.8$
DN15:	$Q_{\min} = u + 2.5$
DN20:	$Q_{\min} = u + 4$
DN25:	$Q_{\min} = u + 8$

#### Formula characteristic line for $Q \geq Q_{\min}$ in l/min

< DN 10 not possible

Frequency output (unfiltered):

DN10:	$Q = K_f \cdot f - 0.40u + 0.20$
DN15:	$Q = K_f \cdot f - 0.45u + 0.25$
DN20:	$Q = K_f \cdot f - 0.55u + 0.25$
DN25:	$Q = K_f \cdot f - 0.80u + 0.60$

Frequency output (filtered):

DN10:	$Q = 0.032 \cdot f - 0.40u + 0.40$
DN15:	$Q = 0.050 \cdot f - 0.45u + 0.45$
DN20:	$Q = 0.080 \cdot f - 0.55u + 0.55$
DN25:	$Q = 0.150 \cdot f - 0.80u + 0.80$

Impulse output:

DN10:	$Q = 0.030 \cdot \text{\#Pulse/s} - 0.40u + 0.40$
DN15:	$Q = 0.060 \cdot \text{\#Pulse/s} - 0.45u + 0.45$
DN20:	$Q = 0.060 \cdot \text{\#Pulse/s} - 0.55u + 0.55$
DN25:	$Q = 0.075 \cdot \text{\#Pulse/s} - 0.80u + 0.80$

Voltage output 0 ... 10 V:

DN10:	$Q = 3.2 \cdot U_{\text{Out}} - 0.40u + 0.40$
DN15:	$Q = 5.0 \cdot U_{\text{Out}} - 0.45u + 0.45$
DN20:	$Q = 8.5 \cdot U_{\text{Out}} - 0.55u + 0.55$
DN25:	$Q = 15.0 \cdot U_{\text{Out}} - 0.80u + 0.80$

Current output 4 ... 20 mA (I in mA):

DN10:	$Q = 2.000 \cdot (I - 4 \text{ mA}) - 0.40u + 0.40$
DN15:	$Q = 3.125 \cdot (I - 4 \text{ mA}) - 0.45u + 0.45$
DN20:	$Q = 5.313 \cdot (I - 4 \text{ mA}) - 0.55u + 0.55$
DN25:	$Q = 9.375 \cdot (I - 4 \text{ mA}) - 0.80u + 0.80$

**Huba Control AG**

Headquarters Schweiz  
Industriestrasse 17  
CH-5436 Würenlos  
Telefon +41 56 436 82 00  
Fax +41 56 436 82 82  
info.ch@hubacontrol.com

**Huba Control AG**

Niederlassung Deutschland  
Schlattgrabenstrasse 24  
D-72141 Walddorfhäslach  
Telefon +49 7127 2393 00  
Fax +49 7127 2393 20  
info.de@hubacontrol.com

**Huba Control AG**

Vestiging Nederland  
Hamseweg 20A  
NL-3828 AD-Hoogland  
Telefoon +31 33 433 03 66  
Telefax +31 33 433 03 77  
info.nl@hubacontrol.com

**Huba Control SA**

Succursale France  
Rue Lavoisier  
Technopôle Forbach-Sud  
F-57602 Forbach Cedex  
Téléphone +33 3 87 84 73 00  
Télécopieur +33 3 87 84 73 01  
info.fr@hubacontrol.com

**Huba Control AG**

Branch Office United Kingdom  
Unit 13 Berkshire House, County Park  
Business Centre, Shivenham Road  
Swindon - Wiltshire SN1 2NR  
Phone +44 1993 77 66 67  
Fax +44 1993 77 66 71  
info.uk@hubacontrol.com

**[www.hubacontrol.com](http://www.hubacontrol.com)**

